


HEPAFIL CR99

H13 MUTLAK FİLTRE KARTUŞLAR
Absolute cartridges H13



filtre malzemesi: filter medium composition:	mikrocam elyaf glass micro fiber
çerçeve malzemesi: frame material:	boyalı sac ve alüminyum painted sheet and aluminium
maksimum çalışma sıcaklığı: max. working temperature:	70°C
Maksimum çalışmada bağlı nem: max. working R.H.:	100%
verim M.P.P.S.: efficiency M. S. S.S.:	≥99,95%
İlk basınç düşümü: initial pressure drop:	220 Pa
son basınç düşümü: final pressure drop:	600 Pa
sınıflandırma [EN 1822-1:2019]: classification [EN 1822-1:2019]:	H13

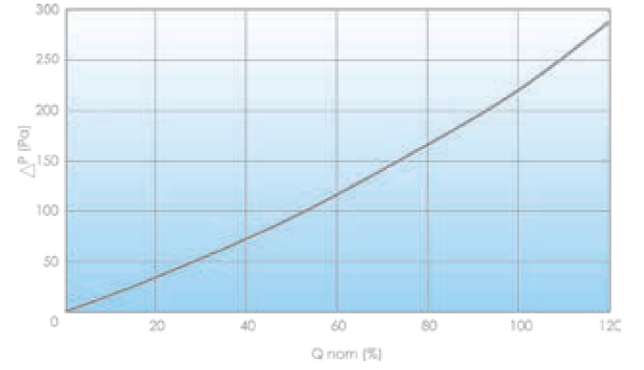

UYGULAMALAR:

- Yüksek sterilite gereken hava iyileştirme sistemlerinde.
- Elektronik ve tıbbi ilaç endüstrisinde hava filtrasyonunda.
- Hastanelerde, laboratuvarlarda ve temiz odalarda hava kontrolünde.
- Yüksek nem ya da serbest yoğunlaşma olmadığı yerlerde.

APPLICATIONS:

- Air treatment systems wherever high sterility is required.
- Air treatment in the electronics and pharmaceutical industry.
- Atmosphere control in hospitals, laboratories and clean rooms.
- In places where there is not a high humidity or free condensation.

kod code	ölçüler dimensions [mm]	hava akışı air flow [m ³ /h]
CR99175	Ø 175 x 175	130
CR99230	Ø 175 x 230	170

NB. Tüm filtrelerin kendine özgü test sertifikaları yanındadır.

NB. All filters are accompanied by their individual testing certificate.