


# HEPAFIL LES

H14 MUTLAK LAMİNER AKIŞ FİLTRELER  
Absolute laminar flow filters H14

filtre malzemesi: filter medium composition:	mikrocam elyaflı glass micro fiber
çerçeve malzemesi: frame material:	MDF
maksimum çalışma sıcaklığı: max. working temperature:	70°C
Maksimum çalışmada bağıl nem: max. working R.H.:	100%
verim M.P.P.S.: efficiency M. S. S.:	≥99,995%
İlk basınç düşümü: initial pressure drop:	140 Pa
son basınç düşümü: final pressure drop:	600 Pa
sınıflandırma [EN 1822-1:2019]: classification [EN 1822-1:2019]	H14

INCENERİBİLE  
INCENERABLE

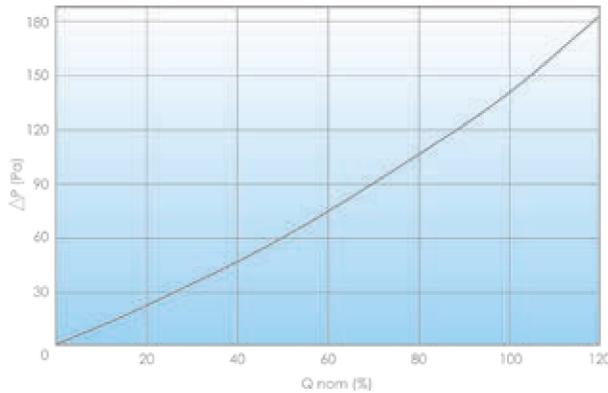

## UYGULAMALAR:

- Temiz odalarda, tavan difüzörlerinde, kirliliğin arıtılmasında dekontamine ortamlar.
- Yüksek sterilit hava istenen ameliyathane ve klinik laboratuvarları gibi yerlerde.
- Elektronik, ilaç fotoğraf ve gıda sektöründe hava iyileştirmesinde.

## APPLICATIONS:

- Clean rooms, diffuser ceiling lights, decontaminated environments.
- Air treatment systems with a high sterility, as required in places such as operating rooms and clinical laboratories.
- Air treatment in the electronics, pharmaceutical, photographic and food industry.

kod code	ölçüler dimensions [mm]	hava akışı air flow [m³/h]
LES1212	305 x 305 x 68	150
LES1224	305 x 610 x 68	300
LES1818	457 x 457 x 68	340
LES2424	610 x 610 x 68	600
LES2121	535 x 535 x 68	460
LES2323	592 x 592 x 68	565

**NB.** Tüm filtrelerin kendine özgü test sertifikaları yanındadır.

**NB.** All filters are accompanied by their individual testing certificate.

