

# TERMILAM TAR-P

FİLTRE TERMİNALİ  
Filter terminal

## ÖZELLİKLER:

Laminar flow filtreleri için, termoplastik plenum ve alüminyum kutudan meydana gelen değiştirilebilir hepa filtrelidir. Eloksallı alüminyum perforated delikli menfezlidir.

**Hava Girişi:** Yandan giriş (seçenek H)  
Üstten giriş (seçenek V)  
Dampersiz (seçenek S) veya  
Damperli (seçenek C)

Bu durumda, yan hava girişli versiyon için, ayarlama steril odalardan yapılabilir.

**Mükemmel Sızdırmaz Conta:** Özelliğini tek parçadan oluşan sızdırmaz yüzeyine borçludur.

**Kontrol Sistemi:** Steril odalardan basınç düşümünü gözlemlemek ve sızdırmazlık testlerini yapmak mümkündür.

## SPECIFICATIONS:

*Bearing structure in anodized aluminium with a thermo moulded plastic superior plenum, capable to house absolute laminar flow filters.*

*Diffusion grid: anodized perforated aluminium diffuser*

*Air inlet: side collar (option H), or vertical collar (option V), with regulating butterfly shutter (option C) or without (option S). In this case, for the version with the side air inlet flow, regulation can be done from the sterile room.*

*Perfect seal tightness: thanks to the sealing surface made in a single piece.*

*Check system: from the sterile room it's possible to monitor pressure drop as well as perform leakage tests.*




## UYGULAMALAR:

- Kontrollü atık odaları, temiz odalar ve ameliyat odaları,
- Düzgün hava akışı istenen steril odalarda.

## APPLICATIONS:

- Controlled contamination rooms, clean rooms and operating theatres.
- Sterile rooms where laminar air flow is required.

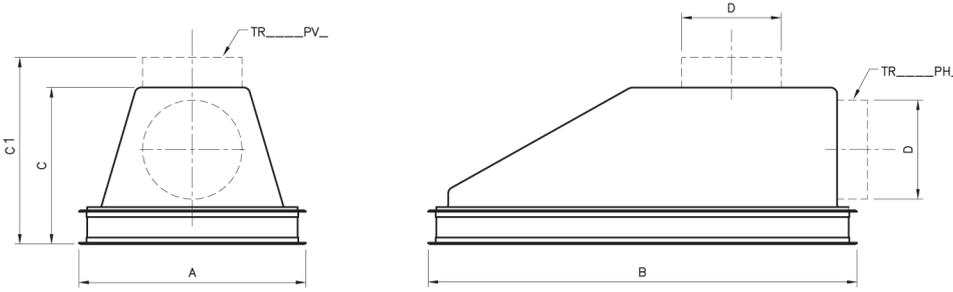

kod code	dış ölçüler external dimension A x B x C/C1 D (mm)	LAM ölçüleri LAM dimensions (mm)
TR1818PVS	532 x 532 x 395 Ø 200	457 x 457 x 68
TR2424PVS	685 x 685 x 455 Ø 250	610 x 610 x 68
TR2448PVS	685 x 1.294 x 525 Ø 250	610 x 1.219 x 68
TR1818PHS/TR1818PHC	532 x 532 x 344 Ø 200	457 x 457 x 68
TR2424PHS/TR2424PHC	685 x 685 x 404 Ø 250	610 x 610 x 68
TR2448PHS/TR2448PHC	685 x 1.294 x 474 Ø 250	610 x 1.219 x 68
TR1818PVC	532 x 532 x 464 Ø 200	457 x 457 x 68
TR2424PVC	685 x 685 x 524 Ø 250	610 x 610 x 68
TR2448PVC	685 x 1.294 x 594 Ø 250	610 x 1.219 x 68